


Steel-Post Shores



DB 350 & DB 550 + Extensions
Ranges from 2m (6' 5") to 6.7m (22')
Galvanized for Durability

- Easy to handle, easy to erect and strip
- Two sizes of post-shores, and extension cover a wide range of heights
- Top and bottom plates have bolt holes
- Top and bottom plates Will accept Ischebeck HV forming System drop-heads
- Adjustment holes at 0.1m (4")
- Easily adjusted at standard working heights
- Use as either shores or re-shores
- No loose parts

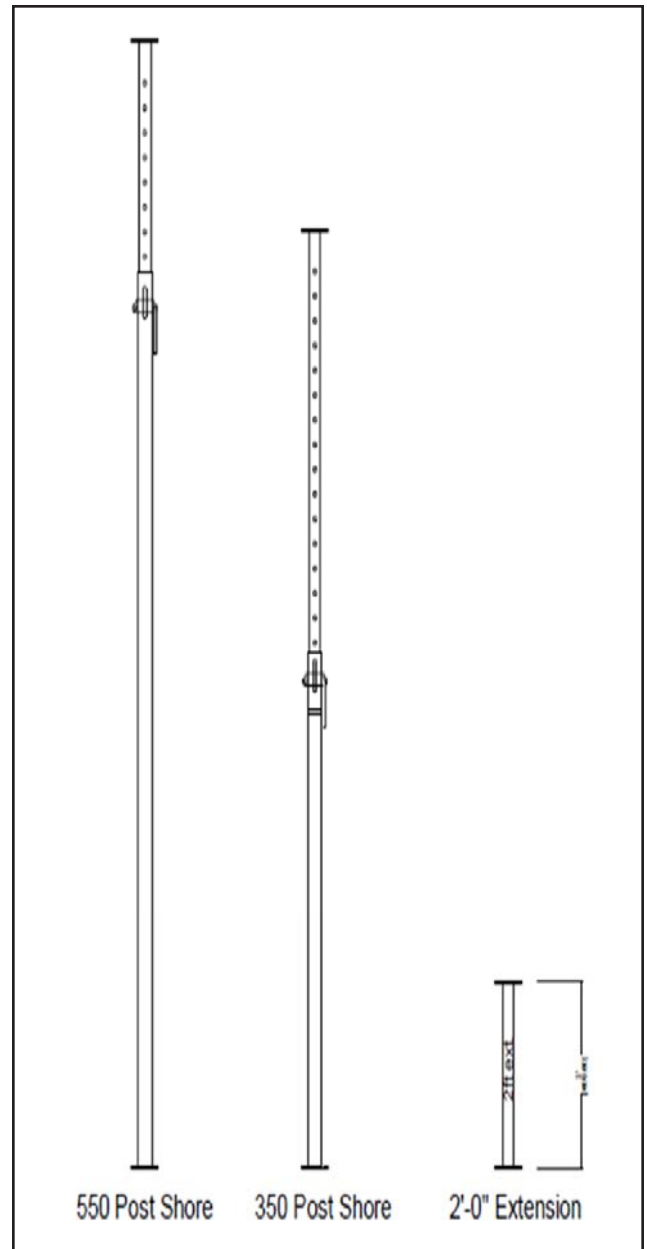

Richform Construction Supply Co. Ltd.
Unit A - 35 Leeder Street
Coquitlam BC, V3K 3V5

e-Mail: info@richform.com
Tel: 1 877 400-5885

Steel-Post Shores



2014-04-01

Steel Post Shore Loads for Canada

		Imperial									
Outer Leg Dia.		3 in.	3 in.	3 in.	3 in.	3 in.	3 in.				
		6'5" - 11'6"	8'5" - 13'6"	10'5" - 15'6"	10'2" - 18'	12'2" - 20'	14'2" - 22'				
Eur		DB 350	DB 350	DB 350	DB 550	DB 550	DB 550				
			2ft ext	2ft ext Top+bott		2ft ext	2ft ext. Top + Bottom				
Post Length											
5'-03"	Safety factor 3:1							5 1/4 ft			
5'-07"								5 2/4 ft			
5'-11"								6 ft			
6'-03"								6 1/4 ft			
6'-07"		9,000 Lbs					6 2/4 ft				
6'-11"		9,000 Lbs					7 ft				
7'-03"		9,000 Lbs					7 1/4 ft				
7'-07"		9,000 Lbs					7 2/4 ft				
7'-10"		9,000 Lbs					7 3/4 ft				
8'-02"		9,000 Lbs					8 1/4 ft				
8'-06"		9,000 Lbs	9,000 Lbs				8 2/4 ft				
8'-10"		9,000 Lbs	9,000 Lbs				8 3/4 ft				
9'-02"		9,000 Lbs	9,000 Lbs				9 1/4 ft				
9'-06"		9,000 Lbs	9,000 Lbs				9 2/4 ft				
9'-10"		9,000 Lbs	9,000 Lbs				9 3/4 ft				
10'-02"		9,000 Lbs	9,000 Lbs			9,000 Lbs	10 1/4 ft				
10'-06"		9,000 Lbs	9,000 Lbs	9,000 Lbs			10 2/4 ft				
10'-10"		9,000 Lbs	9,000 Lbs	9,000 Lbs			10 3/4 ft				
11'-02"		9,000 Lbs	9,000 Lbs	9,000 Lbs			11 1/4 ft				
11'-06"		9,000 Lbs	9,000 Lbs	9,000 Lbs			11 2/4 ft				
11'-10"			8,800 Lbs	8,800 Lbs	9,000 Lbs		11 3/4 ft				
12'-02"			8,600 Lbs	8,600 Lbs	8,700 Lbs	8,700 Lbs		12 1/4 ft			
12'-06"			8,400 Lbs	8,400 Lbs	8,700 Lbs	8,700 Lbs		12 2/4 ft			
12'-10"			8,200 Lbs	8,200 Lbs	8,700 Lbs	8,700 Lbs		12 3/4 ft			
13'-01"			8,000 Lbs	8,000 Lbs	8,700 Lbs	8,700 Lbs		13 ft			
13'-05"			7,800 Lbs	7,800 Lbs	8,700 Lbs	8,700 Lbs		13 2/4 ft			
13'-09"				7,600 Lbs	8,700 Lbs	8,700 Lbs		13 3/4 ft			
14'-01"				7,400 Lbs	8,700 Lbs	8,700 Lbs		14 ft			
14'-05"				7,200 Lbs	8,200 Lbs	8,490 Lbs	8,700 Lbs		14 2/4 ft		
14'-09"				7,000 Lbs	7,700 Lbs	8,280 Lbs	8,700 Lbs		14 3/4 ft		
15'-01"				6,800 Lbs	7,200 Lbs	8,070 Lbs	8,450 Lbs		15 ft		
15'-05"				6,600 Lbs	6,700 Lbs	7,860 Lbs	8,200 Lbs		15 2/4 ft		
15'-09"					6,200 Lbs	7,650 Lbs	7,950 Lbs		15 3/4 ft		
16'-01"					6,000 Lbs	7,440 Lbs	7,700 Lbs		16 ft		
16'-05"					5,900 Lbs	7,120 Lbs	7,450 Lbs		16 2/4 ft		
16'-09"					5,700 Lbs	6,800 Lbs	7,200 Lbs		16 3/4 ft		
17'-01"					5,500 Lbs	6,480 Lbs	6,950 Lbs		17 ft		
17'-05"					5,300 Lbs	6,160 Lbs	6,700 Lbs		17 2/4 ft		
17'-09"					5,100 Lbs	5,840 Lbs	6,450 Lbs		17 3/4 ft		
18'-01"					4,900 Lbs	5,520 Lbs	6,200 Lbs		18 ft		
18'-04"						5,240 Lbs	5,950 Lbs		18 1/4 ft		
18'-08"						4,960 Lbs	5,700 Lbs		18 3/4 ft		
19'-00"						4,680 Lbs	5,450 Lbs		19 ft		
19'-04"						4,400 Lbs	5,200 Lbs		19 1/4 ft		
19'-08"						4,120 Lbs	5,000 Lbs		19 3/4 ft		
20'-00"						3,840 Lbs	4,800 Lbs		20 ft		
20'-04"							4,600 Lbs		20 1/4 ft		
20'-08"							4,400 Lbs		20 3/4 ft		
21'-00"							4,200 Lbs		21 ft		
21'-04"							4,000 Lbs		21 1/4 ft		
21'-08"							3,800 Lbs		21 3/4 ft		
22'-00"							3,600 Lbs		22 ft		

Subject to change without notice. Please always check back with Ischebeck Can Ltd.