


Steel-Post Shores



DB 350 & DB 550 + Extensions
Ranges from 2m (6' 5") to 6.7m (22')
Galvanized for Durability

- Easy to handle, easy to erect and strip
- Two sizes of post-shores, and extension cover a wide range of heights
- Top and bottom plates have bolt holes
- Top and bottom plates Will accept Ischebeck HV forming System drop-heads
- Adjustment holes at 0.1m (4")
- Easily adjusted at standard working heights
- Use as either shores or re-shores
- No loose parts

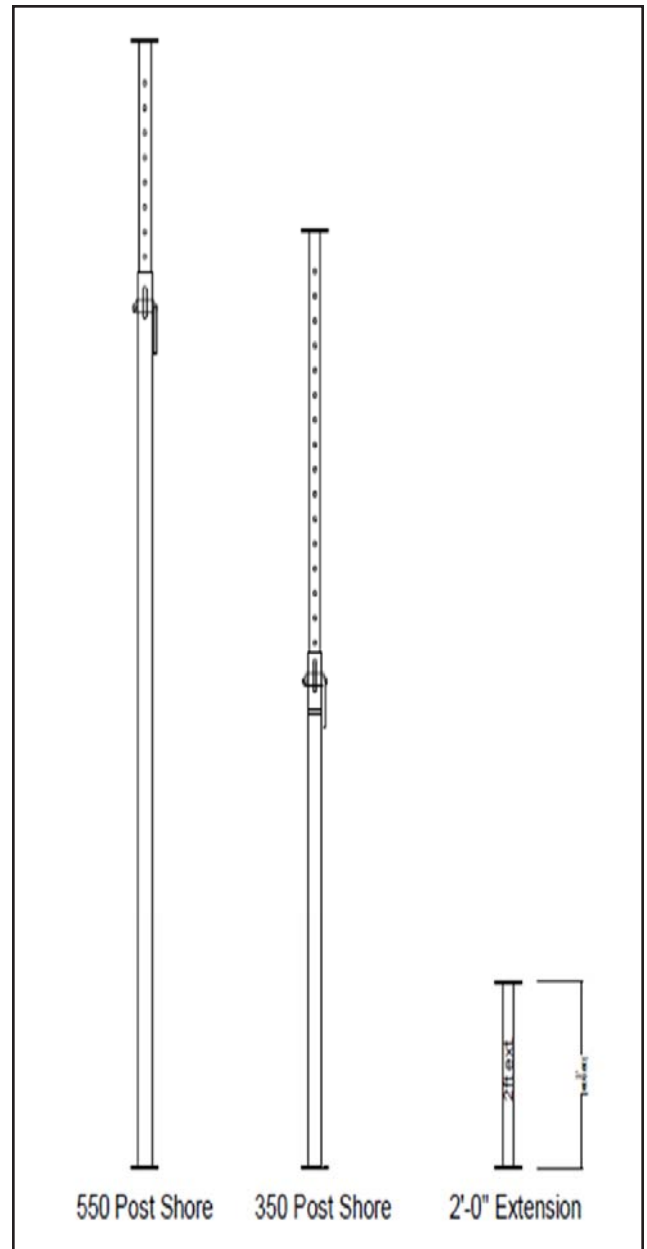

Richform Construction Supply Co. Ltd.
Unit A - 35 Leeder Street
Coquitlam BC, V3K 3V5

e-Mail: info@richform.com
Tel: 1 877 400-5885

Steel-Post Shores



2014-04-01

Steel Post Shore Loads for Canada

| Outer Leg Dia. | 75mm | 75mm | 75mm | 75mm | 75mm | 75mm | |
|--------------------|-------------------|-------------|---------------------|-------------|-------------|--------------------------|--------|
| | 2.0m - 3.5m | 2.6m - 4.1m | 3.2m - 4.7m | 3.1m - 5.5m | 3.7m - 6.1m | 4.4m - 6.7m | |
| Eur | DB 350 | DB 350 | DB 350 | DB 550 | DB 550 | DB 550 | |
| | | 2ft ext | 2ft ext Top+bott | | 2ft ext | 2ft ext. Top + Bottom | |
| Post Length | Safety factor 3:1 | | | | | Post Length | |
| 1.60 m | | | | | | 1.60 m | |
| 1.70 m | | | | | | 1.70 m | |
| 1.80 m | | | | | | 1.80 m | |
| 1.90 m | | | | | | 1.90 m | |
| 2.00 m | 40.8 KN | | | | | 2.00 m | |
| 2.10 m | 40.8 KN | | | | | 2.10 m | |
| 2.20 m | 40.8 KN | | | | | 2.20 m | |
| 2.30 m | 40.8 KN | | | | | 2.30 m | |
| 2.40 m | 40.8 KN | | | | | 2.40 m | |
| 2.50 m | 40.8 KN | | | | | 2.50 m | |
| 2.60 m | 40.8 KN | 40.8 KN | | | | 2.60 m | |
| 2.70 m | 40.8 KN | 40.8 KN | | | | 2.70 m | |
| 2.80 m | 40.8 KN | 40.8 KN | | | | 2.80 m | |
| 2.90 m | 40.8 KN | 40.8 KN | | | | 2.90 m | |
| 3.00 m | 40.8 KN | 40.8 KN | | | | 3.00 m | |
| 3.10 m | 40.8 KN | 40.8 KN | | 40.8 KN | | 3.10 m | |
| 3.20 m | 40.8 KN | 40.8 KN | 40.8 KN | 40.8 KN | | 3.20 m | |
| 3.30 m | 40.8 KN | 40.8 KN | 40.8 KN | 40.8 KN | | 3.30 m | |
| 3.40 m | 40.8 KN | 40.8 KN | 40.8 KN | 40.8 KN | | 3.40 m | |
| 3.50 m | 40.8 KN | 40.8 KN | 40.8 KN | 40.8 KN | | 3.50 m | |
| 3.60 m | | 39.9 KN | 39.9 KN | 40.8 KN | | 3.60 m | |
| 3.70 m | | 39.0 KN | 39.0 KN | 39.5 KN | 39.5 KN | 3.70 m | |
| 3.80 m | | 38.1 KN | 38.1 KN | 39.5 KN | 39.5 KN | 3.80 m | |
| 3.90 m | | 37.2 KN | 37.2 KN | 39.5 KN | 39.5 KN | 3.90 m | |
| 4.00 m | | 36.3 KN | 36.3 KN | 39.5 KN | 39.5 KN | 4.00 m | |
| 4.10 m | | 35.4 KN | 35.4 KN | 39.5 KN | 39.5 KN | 4.10 m | |
| 4.20 m | | | 34.5 KN | 39.5 KN | 39.5 KN | 4.20 m | |
| 4.30 m | | | 33.6 KN | 39.5 KN | 39.5 KN | 4.30 m | |
| 4.40 m | | | 32.7 KN | 37.2 KN | 38.5 KN | 39.5 KN | 4.40 m |
| 4.50 m | | | 31.7 KN | 34.9 KN | 37.6 KN | 39.5 KN | 4.50 m |
| 4.60 m | | | 30.8 KN | 32.7 KN | 36.6 KN | 38.3 KN | 4.60 m |
| 4.70 m | | | 29.9 KN | 30.4 KN | 35.6 KN | 37.2 KN | 4.70 m |
| 4.80 m | | | | 28.1 KN | 34.7 KN | 36.1 KN | 4.80 m |
| 4.90 m | | | | 27.2 KN | 33.7 KN | 34.9 KN | 4.90 m |
| 5.00 m | | | | 26.8 KN | 32.3 KN | 33.8 KN | 5.00 m |
| 5.10 m | | | | 25.9 KN | 30.8 KN | 32.7 KN | 5.10 m |
| 5.20 m | | | | 24.9 KN | 29.4 KN | 31.5 KN | 5.20 m |
| 5.30 m | | | | 24.0 KN | 27.9 KN | 30.4 KN | 5.30 m |
| 5.40 m | | | | 23.1 KN | 26.5 KN | 29.3 KN | 5.40 m |
| 5.50 m | | | | 22.2 KN | 25.0 KN | 28.1 KN | 5.50 m |
| 5.60 m | | | | | 23.8 KN | 27.0 KN | 5.60 m |
| 5.70 m | | | | | 22.5 KN | 25.9 KN | 5.70 m |
| 5.80 m | | | | | 21.2 KN | 24.7 KN | 5.80 m |
| 5.90 m | | | | | 20.0 KN | 23.6 KN | 5.90 m |
| 6.00 m | | | | | 18.7 KN | 22.7 KN | 6.00 m |
| 6.10 m | | | | | 17.4 KN | 21.8 KN | 6.10 m |
| 6.20 m | | | | | | 20.9 KN | 6.20 m |
| 6.30 m | | | | | | 20.0 KN | 6.30 m |
| 6.40 m | | | | | | 19.0 KN | 6.40 m |
| 6.50 m | | | | | | 18.1 KN | 6.50 m |
| 6.60 m | | | | | | 17.2 KN | 6.60 m |
| 6.70 m | | | | | | 16.3 KN | 6.70 m |

Subject to change without notice. Please always check back with Ischebeck Can Ltd.